

Tenda



All for better networking.

HG1

Single Port xPON ONT



HG1

Single Port xPON ONT

Products Description

Tenda's HG1 is a Gigabit Passive Optical Network (PON) terminal, ideal for Fiber to the Home solution. It's an all-in-one device allowing users to access high-speed internet connection via xPON port. HG1 provides a perfect terminal solution and future-oriented service supporting capabilities for FTTH deployment.

Key Features

- * Strong compatibility
- * High speed access, imagine speed fiber
- * Supports routing mode and bridge mode access.
- * Remote management, plug and play

Product Features



Auto-adaption for both EPON and GPON Network

Complies with ITU G.984.1, ITU G.984.2, ITU G.984.3, ITU G.984.4 and IEEE 802.3ah, HG1 can support GPON and EPON network. Providing you comprehensive network compatibility. With TR069 and OMCI/OAM remote management, HG1 offers a full remote control without user intervention.



100 times faster than conventional 24Mbps ADSL


Downstream rate up to 2.5Gbps which is 100 times faster than conventional 24Mbps ADSL brings freewheeling internet access.



Gigabit LAN port supports ultra-fast data transmission

1 Gigabit wired LAN port supports ultra-fast data transfer. HG1 can bring freewheeling internet access, making it a great choice to build multimedia entertainment network easily.

Application Scenarios

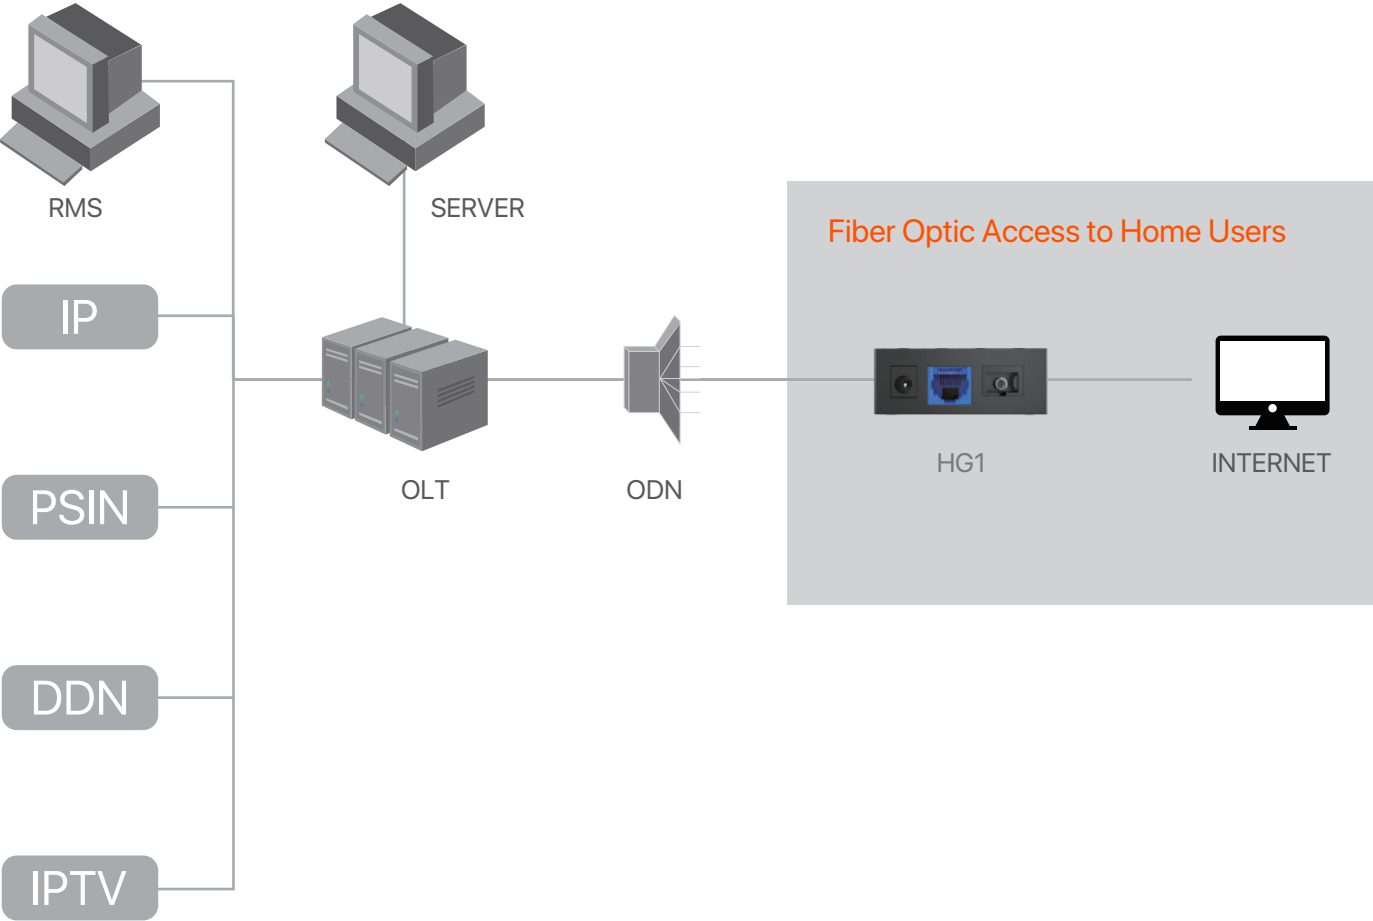

Specification

Hardware Features	
Model	HG1
Standard&Protocol	ITU G.984.1, ITU G.984.2, ITU G.984.3, ITU G.984.4, IEEE 802.3ah
Port	1*GE, 1*Power-in, 1* Fiber
PON Connector	SC/APC (SC/UPC optional)
Button	1*Reset
Size (W * D * H)	59x54x23mm
LED	PWR, PON, LOS, LAN
Power-in	9V DC / 0.6 A
Power consumption	≤5.4W
Software	
Access Mode	Routing mode, Bridge Mode, Ethernet II, IEEE 802.1Q, VLAN
Business Type	Internet
Security Function	Mac filter, IP filter, URL filter, Access control
Management Support	Local WEB manament, Remote updated, Switch auto between EN and CN, OMCI
Operation System	Microsoft® Windows® XP or Vista™ or 10, 7, 8 or MAC® OS, NetWare®, UNIX® or Linux.
VLAN ID Range	1-4088 (0,4089-4095 is used already)
Others	
Temperature	Storeage temperature: -40 °C - 70°C Operating temperature: 0 °C - 40°C
Humidity	Storeage humidity: 5% - 90%(Non-condensing) Operating humidity: 10% - 90%(Non-condensing)
Package	1*HG1, 1*Power adapter, 1*Quick installation guide

SHENZHEN TENDA TECHNOLOGY CO.,LTD.

Tenda Technology Bldg.Int' I E-City,
#1001 Zhong Shan Yuan Rd.,Nanshan District,Shenzhen China.

E-mail:support@tenda.com.cn

Tel:+86-755-2765 7098

Fax:+86-755-2765 7178

PC:518055

