


**Tenda**



# RX12 Pro v2.0

AX3000 Dual Band Gigabit Wi-Fi 6 Router

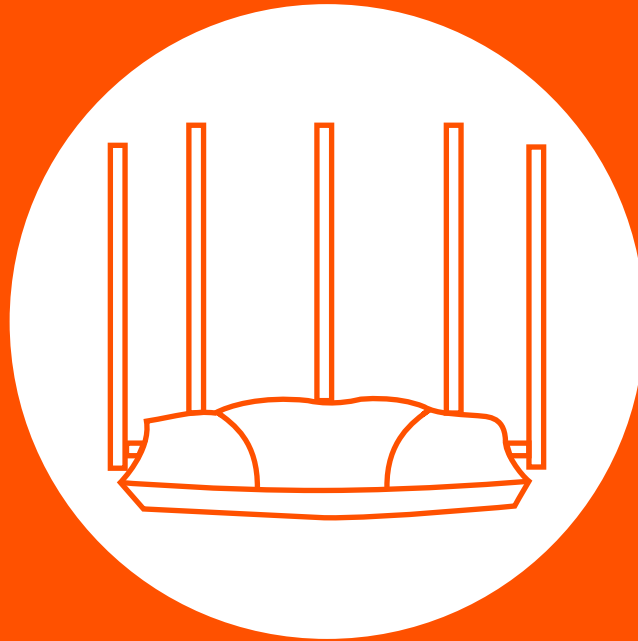


# RX12 Pro v2.0

## AX3000 Dual Band Gigabit Wi-Fi 6 Router

### Description

RX12 Pro V2.0 is a dual-band Gigabit Wi-Fi 6 wireless router designed for users who pursue performance experience. Both its dual-bands support Wi-Fi 6 (802.11ax) technology and the concurrent rate is up to 2976Mbps (5GHz:2402Mbps, 2.4GHz: 574Mbps). RX12 Pro V2.0 is equipped with a 12nm process dual-core 1.3GHz CPU to ensure a stable and smooth network environment; supports Wi-Fi+, which can easily solve the problem of stable Wi-Fi coverage in very large homes; equipped with 5 built-in high-power FEMs , Wi-Fi has stronger wall penetration capabilities and longer transmission distances; it uses OFDMA+MU-MIMO technology to allow more devices to access the Internet at the same time, significantly improving transmission efficiency and significantly reducing latency.

# Main Features

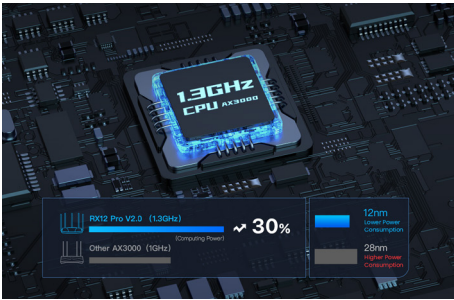


## Dual-Core Processor , Smooth Network

RX12 Pro V2.0 is equipped with a 1.3GHz dual-core CPU, which uses an advanced 12nm process. Its comprehensive computing power is 30% higher than that of the old dual-core AX3000 router. This makes the router consume less power and generate less heat, and its strength ensures a stable and smooth network.



## Stronger Wi-Fi Signal Throughout Your Home

RX12 Pro V2.0 uses 5 external 6dBi high-gain omnidirectional antennas and 5 built-in high-performance signal enhancement modules to comprehensively improve signal transmission and reception sensitivity. The 5GHz signal is faster and more stable, making it easy to achieve high-speed whole-house Wi-Fi 6 for medium and large apartments.

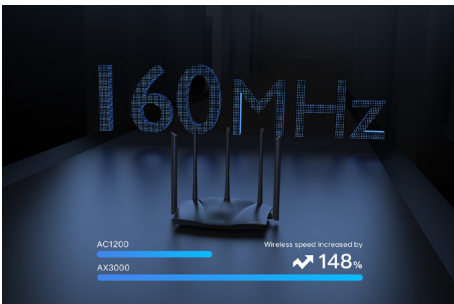


## Smooth Internet Experience with AX3000

The RX12 Pro V2.0 has a dual-band concurrent rate of up to 2976Mbps, with 2402Mbps for the 5GHz band and 574Mbps for the 2.4GHz band. It also supports an ultra-large 160MHz bandwidth, which can be used with mobile phones that support the same bandwidth. This allows for the signal to travel freely over a wider channel, maximizing the performance of your devices and enhancing your internet experience.



## Ultra-wide Coverage with Wi-Fi+

Equipped with the Wi-Fi+ function, multiple RX12 Pro V2.0 can be easily networked without configuration, realizing a high-speed whole-home Wi-Fi experience for larger units.

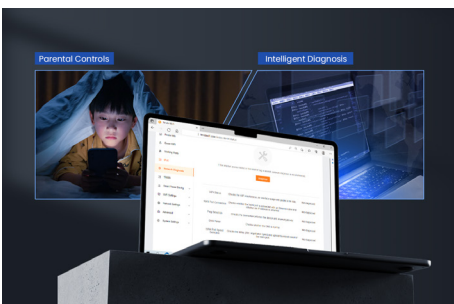

## Rich Functions , Easy to Master

Using Tenda WiFi APP or Web management page, you can instantly have a variety of practical functions: such as controlling children's Internet access, intelligent fault diagnosis to prevent addiction to the network, quick self-test and complete network repair. More features, please stay tuned!

# Technical Specifications

Hardware features	
Standard&Protocol	IEEE802.3, IEEE802.3u, IEEE802.3ab
CPU	Dual-Core 1.3GHz CPU
RAM	256MB
Interface	1× Gigabit WAN Port 3× Gigabit LAN Ports
Antenna	5*6dbi external antennas
Button	1*WPS/Mesh button 1*Reset button
Power	Input: AC 100-240V~50/60H Output: DC 12V---1A
LED indicator	1* LED
Dimensions	(L*W*H)267*166*222 mm
Wireless features	
Wireless Standards	IEEE 802.11ax/ac/n/a 5 GHz IEEE 802.11ax/n/b/g 2.4 GHz
Data Rate	5 GHz: 2402 Mbps (802.11ax, HE160) 2.4 GHz: 574 Mbps (802.11ax)
Frequency	CE: 2.4G: 2412-2472MHz(CH1-CH13) 5G: 5150-5350MHz(CH36-CH64) FCC: 2.4G: 2412-2462MHz(CH1-CH11) 5G: 5150-5350MHz(CH36-CH64) 5725-5850MHz(CH149-CH165)
Transmission Power	CE: <20 dBm (2.4 GHz) <23 dBm (5 GHz) FCC: <30 dBm (2.4 GHz) <30 dBm (5 GHz)

## Technical Specifications

Basic Functions	SSID broadcasting and hiding MU-MIMO Beamforming signal directional transmission technology 160MHz OFDMA 1024-QAM
Wireless Security	WPA2-PSK WPA3-SAE/WPA2-PSK Wireless Security: Enable/Disable WPS(WiFi Protected Set-up) fast encryption
<b>Software Function</b>	
Internet Connection Type	PPPoE, Dynamic IP, Static IP PPPoE(Russia), PPTP(Russia), L2TP(Russia) Unify, Maxis, Maxis-special, Celcom, Digi
Network Protocol	IPv4&IPv6
Operating Mode	Router Mode AP Mode Universal Repeater Mode (Client+AP,WISP)
Parental Control	Client Filter URL Filter Time Limit
DHCP	DHCP Server DHCP Client List DHCP Static IP Address Reservation and Allocation
Virtual Server	Port Forwarding, DMZ Host, UPnP
Firewall	ICMP Flood Attack Defense TCP Flood Attack Defense UDP Flood Attack Defense Block Ping From WAN
DDNS	DynDNS, no-ip, oray, 88ip
VPN	IPSec Transparent Transmission PPTP Transparent Transmission L2TP Transparent Transmission PPTP VPN Server PPTP VPN Client L2TP VPN Client

## Technical Specifications

Special Features	<ul style="list-style-type: none"> <li>Wi-Fi+(Mesh System)</li> <li>Smart diagnosis</li> <li>IPTV</li> <li>IPv6</li> <li>Smart LED on/off</li> </ul>
Other Function	<ul style="list-style-type: none"> <li>Support App and web management</li> <li>Bandwidth Control</li> <li>Guest Network</li> <li>MAC Address Clone</li> <li>Supports black list and white list</li> <li>Unify 2.4 GHz &amp; 5 GHz</li> <li>Static Routing</li> <li>Remote Web Management</li> <li>Backup &amp; Restore configurations</li> <li>Firmware upgrade online</li> </ul>
<b>Other Features</b>	
Temperature	<ul style="list-style-type: none"> <li>Operating Temperature : 0 °C ~40 °C</li> <li>Storage Temperature : -40C ~70 C</li> </ul>
Humidity	<ul style="list-style-type: none"> <li>Operating Humidity : 10 %~90% RH non-condensing</li> <li>Storage Humidity : 5 %~ 90%RH non-condensing</li> </ul>
Certification	CE, FCC,RoHS
Package Content	<ul style="list-style-type: none"> <li>Wi-Fi Router *1</li> <li>RJ45 Ethernet Cable*1</li> <li>Power Adapter*1</li> <li>Quick Installation Guide*1</li> </ul>

## **SHENZHEN TENDA TECHNOLOGY CO.,LTD.**

Tenda Technology Bldg.Int'l E-City,  
#1001 Zhong Shan Yuan Rd.,Nanshan District,Shenzhen China.

E-mail:support@tenda.com.cn

Tel:+86-755-2765 7098

Fax:+86-755-2765 7178

PC:518055

