
# Tenda



U11

AX900 Wi-Fi 6 Wireless USB Adapter

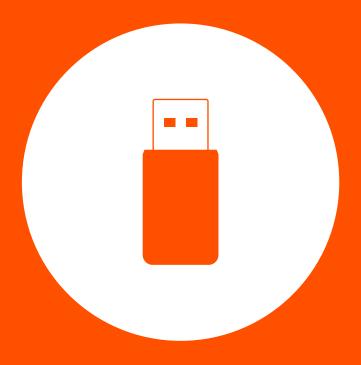

# **U11**

## AX900 Wi-Fi 6 Wireless USB Adapter

### **Products Description**

With a mini and portable exterior, the Wi-Fi 6 driver-free adapter U11 fits securely into your computer and does not affect the usage of neighboring ports. It contains an internal driver, which completes installation automatically once plugged into your computer without tedious installation steps. Therefore, you do not need to manually install the driver with a CD-ROM or a file downloaded from the internet. It is compatible with many operating systems including Windows 11, Windows 10, Windows 7, and Linux, to meet the requirements of various desktop and laptop users for wireless internet connections.

#### **Product Features**



### Upgrade to WiFi 6 For Better Experience

Both U11 dual-bands support the new generation Wi-Fi 6 technology, with dual-band concurrent rates up to 886Mbps (2.4GHz 286Mbps+5GHz 600Mbps), allowing you to enjoy a wireless network with faster transmission and lower latency.



#### Auto-install, Plug And Play

U11 completes installation automatically once plugged into your computer without tedious installation steps.



#### Compatible with Various Operating Systems

Compatible with Windows 11, Windows 10, Windows 7, Linux 3.10+, to meet the requirements of various desktop and laptop users for wireless internet connections.

## **Specification**

Hardware features	
Interfaces	USB2.0
Antenna Type	PIFA Antenna
LED Indicator	1 * System LED
Dimension	36.8mm*18.5mm*7.6mm(L x W x H)
Wireless features	
Wireless Standard	IEEE802.11b, IEEE 802.11g, IEEE 802.11n, IEEE 802.11a, IEEE 802.11ac, IEEE 802.11ax
Frequency	5GHz 2.4GHz
Data Rate	5GHz: 600Mbps 2.4GHz: 286Mbps
Transmission Power	2.4GHz<20dBm (EIRP); 5GHz<23dBm (EIRP)
Wireless Modes	Station Mode, AP Mode
Wireless Security	WPA-PSK / WPA2-PSK, WPA / WPA2
Other Features	
Certification	CE, FCC, RoHS
System Requirements	windows10, Windows11, Windows 7, Linux 3.10+
Operating Environment	Operating Temperature: 0°C ~ 40°C(32°F ~ 104°F)  Operating Humidity: 10% ~ 90% RH non-condensing
Storage Environment	Storage Temperature: $-40^{\circ}F \sim 158^{\circ}F$ ( $-40^{\circ}C \sim 70^{\circ}C$ ) Storage Humidity: $5\% \sim 90\%$ RH non-condensing
Package Contents	1 * U11 Wireless USB Adapter 1 * Install Guide

AX900 Wi-Fi 6 Wireless USB Adapter U11

#### SHENZHEN TENDA TECHNOLOGY CO.,LTD.

Tenda Technology Bldg.Int' I E-City, #1001 Zhong Shan Yuan Rd., Nanshan District, Shenzhen China.

E-mail:support@tenda.com.cn Tel:+86-755-2765 7098 Fax:+86-755-2765 7178 PC:518055